Aircraft # N1973FE	Work Card Title	Card No. 353-11	Date
Team #	**A300 Extract Fan (73HR) Procedure**		PAGE 1 of 2

TASK CARD INSTRUCTIONS: This task card provides instructions to walk you through the steps required for the removal and installation of the ***EXTRACT FAN (73HR)***.

Complete each step as written and enter initials in the "Accomplished By" block.

NOTE: **ALL SAFETY WIRING MUST BE REINSTALLED AS REQUIRED.**
NOTE: See Figure 101 for Safety Instruction.

1) Use the provided binder to find and record the correct AMM reference.

   A. Record the AMM Reference: _____

Accomplished By	Checked By

2) De-energize aircraft power, open breaker and install safety collar at control panel.

Accomplished By	Checked By

3) Enter lower fuselage access panel.
4) Remove electrical connector.
5) Remove all necessary clamps and flexible sleeves to free fan.

Accomplished By	Checked By

6) Support fan and remove fan motor assy.
7) Record serial numbers and any damage discovered.

SN: _____

Accomplished By	Checked By

8) Must obtain ok to Install from Judge verbally.

Accomplished By	Checked By

9) Reinstall boots and clamps.
10) Torque clamps to the value given on the clamps, must show judge set torque tool.

Accomplished By	Checked By

11) Reinstall electrical connector.
12) Ensure all components are secure.

Accomplished By	Checked By

13) Control panel… reapply power, close breaker, and wait for fan flow indicator light to illuminate
14) Ensure work area is clean, clear of tools, miscellaneous items and /or FOD.
15) Leave A/C in normal configuration.
16) All torquing tools must be returned to zero or lowest setting.
17) Notify Judge to "**STOP THE CLOCK"**

Accomplished By	Checked By
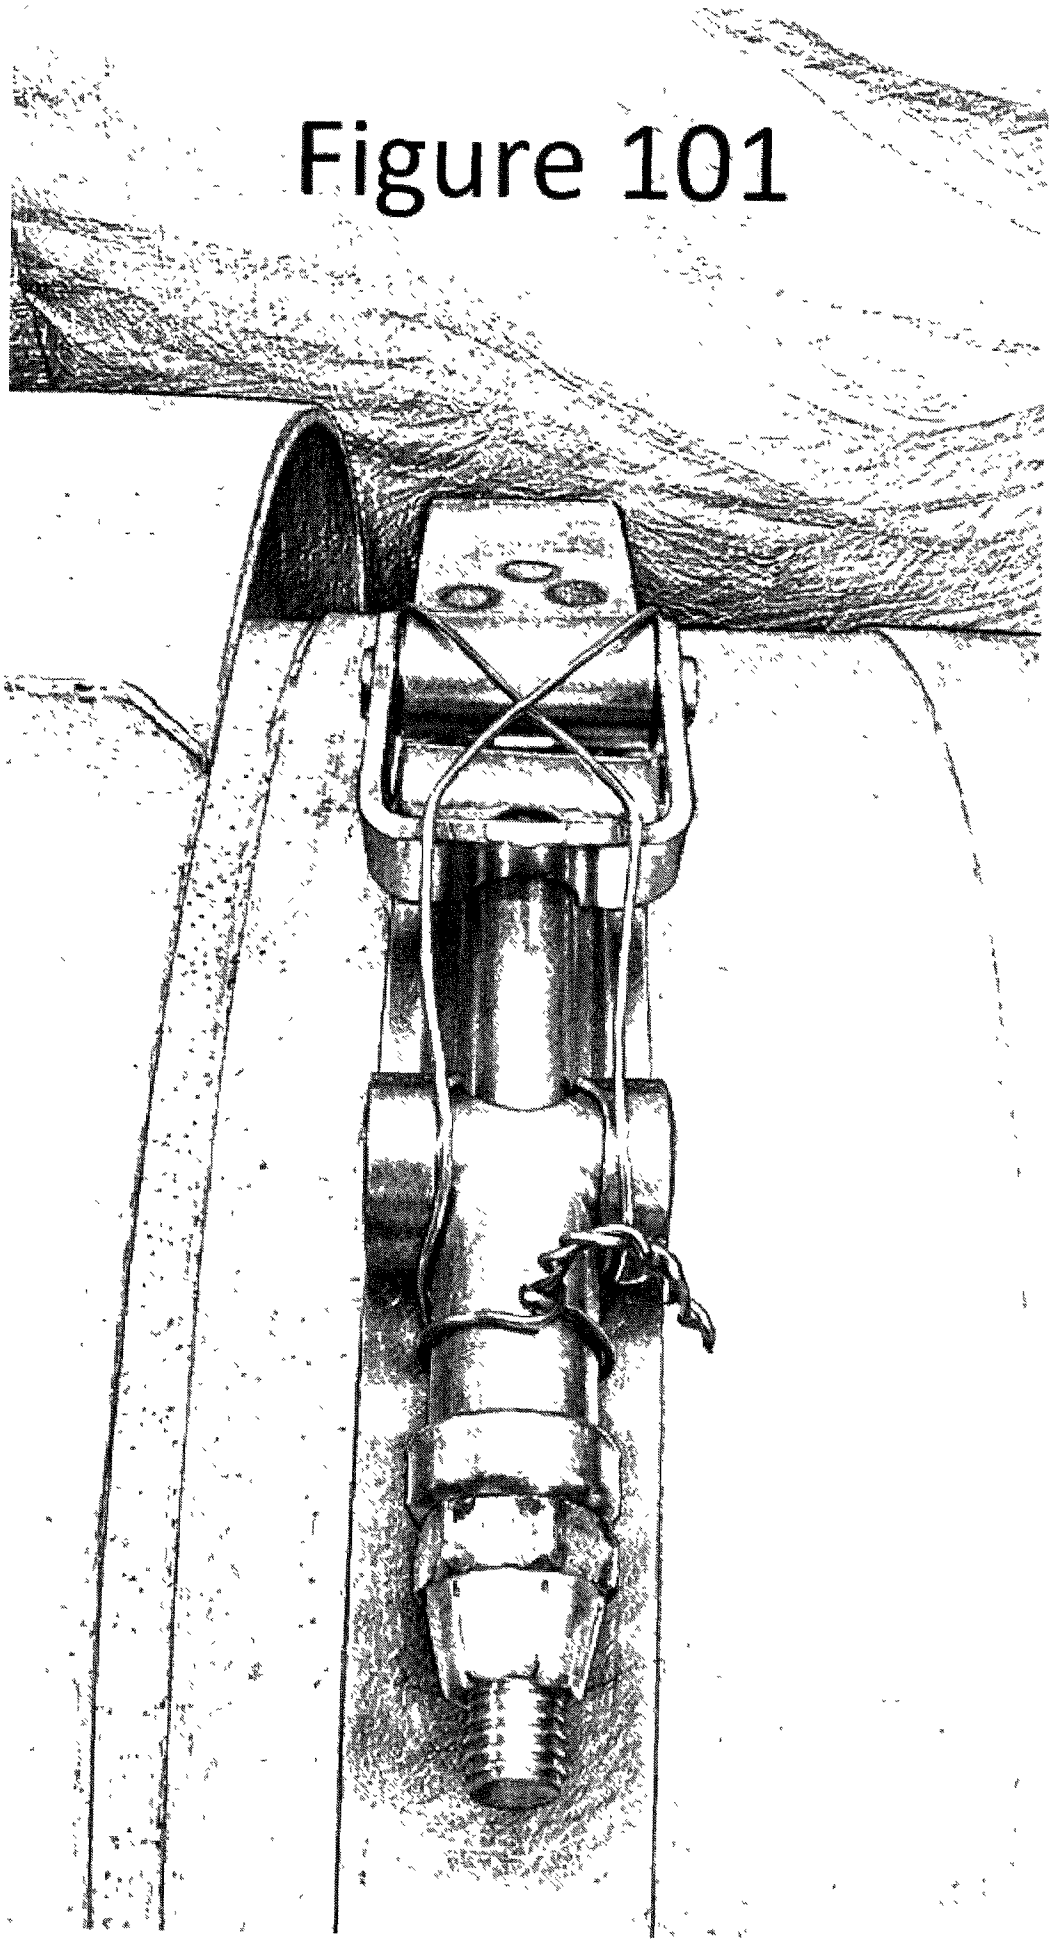
Figure 101